



INSTALLATION INSTRUCTIONS


Accessory
CROSS BARS
P/N 08L04-SZA-110

Application
2010 PILOT

Publications No.
All 41637
Issue Date
MAY 2009

PARTS LIST

- 2 Cross bars




- 2 Torx bolts



TOOLS AND SUPPLIES REQUIRED

- Flat-tip screwdriver
- Shop towel
- T-30 Torx driver

Illustration of the Cross Bars Installed on the Vehicle

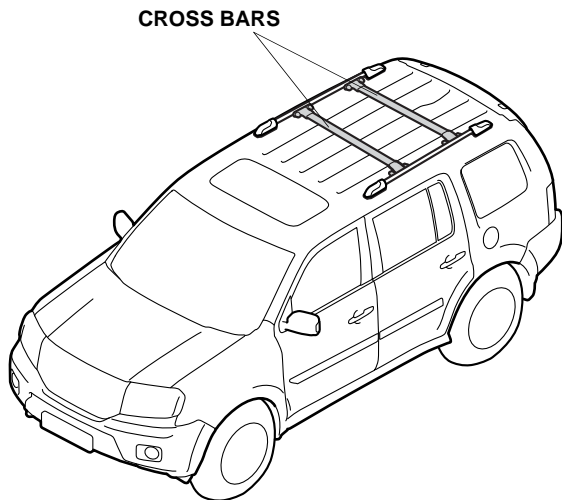

INSTALLATION



Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE:


- The weight of cargo must not exceed the maximum weight capacity 75 kg (165 lbs).
- Wipe and clean the roof racks before installing the cross bar.
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the cross bar.

Installing the Cross Bars


1. Remove the left rear roof rack cover and right rear roof rack cover from the roof rack by disengaging two clips each.

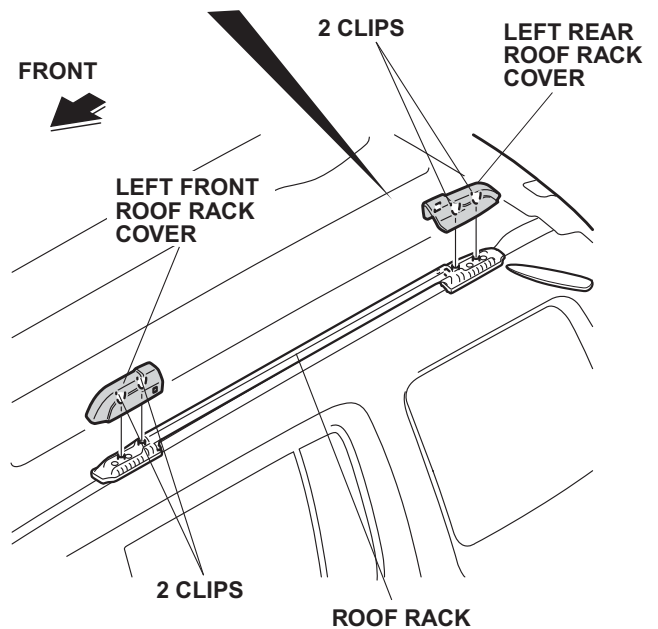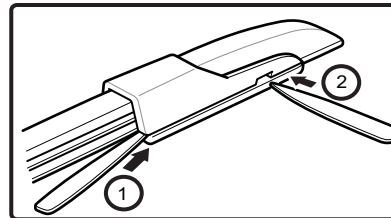


2. Slide two cross bars into the roof racks and align the mark on the cross bars with the mark on the roof racks as shown. Make sure the cross bars are inserted in the correct position and direction.

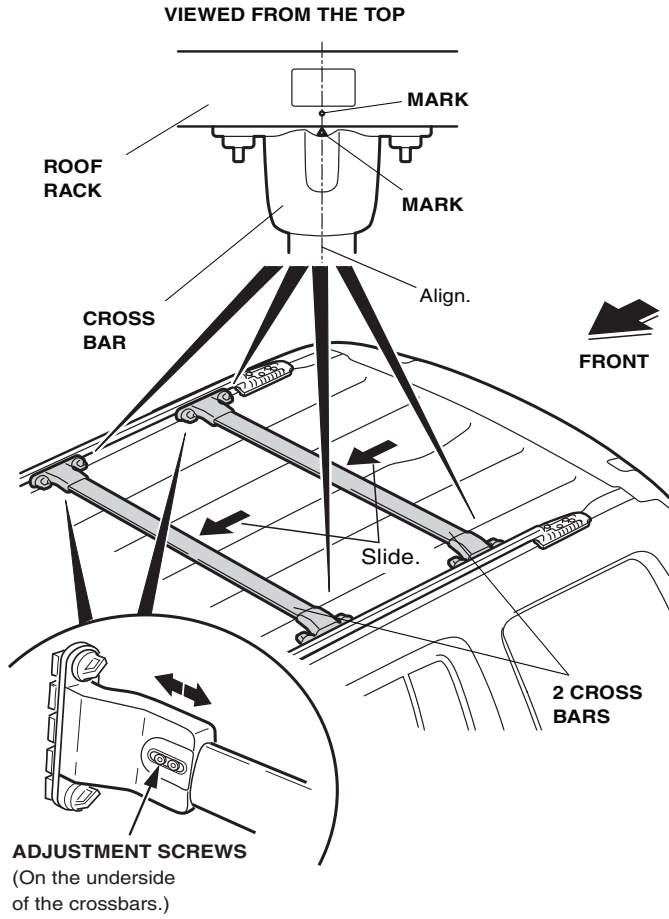

3. Tighten eight thumbwheel screws to secure two cross bars to the roof racks.

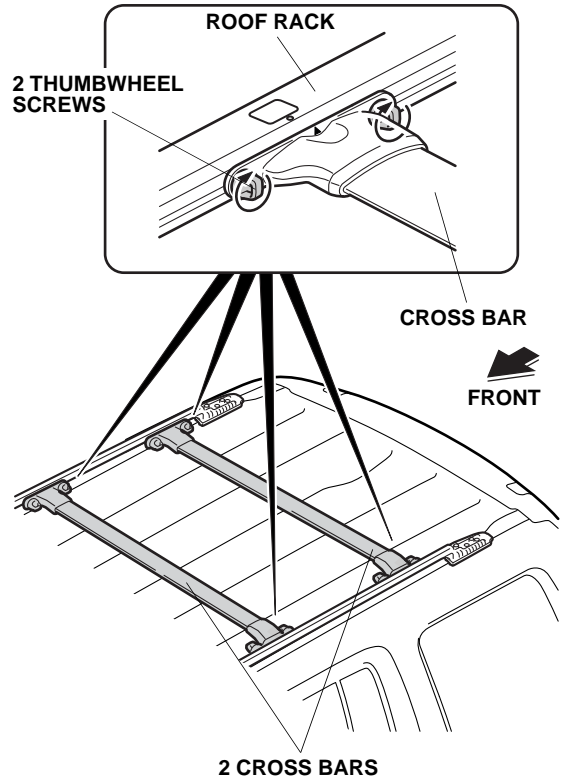

4. Install two Torx bolts to the roof racks securely.

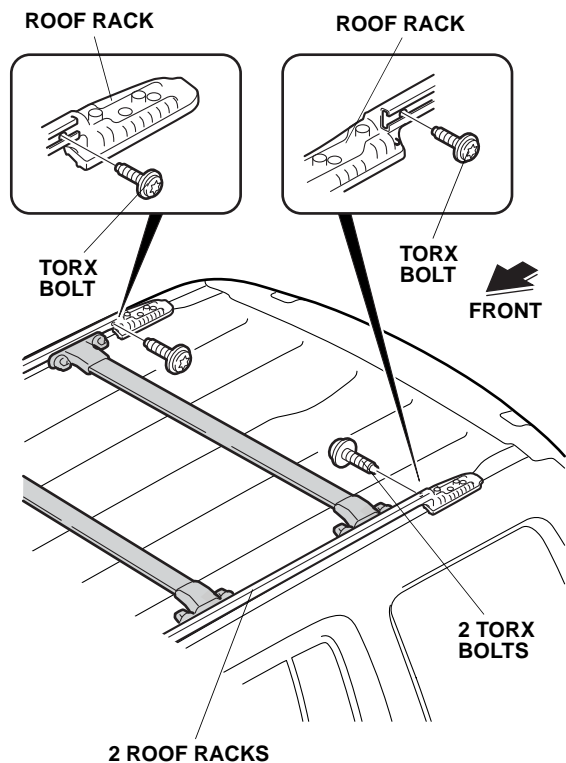

5. Reinstall the roof rack covers. Make sure they are securely snapped into place.

USE AND CARE

- Check the roof rack and cross bar mounting bolts frequently, and re-tighten if necessary.
- Distribute the weight of the cargo evenly, and do not exceed the maximum weight capacity of 75 kg (165 lbs).